

## **L30D/300-850W Single Channel Digital Finished Amplifier Board IRS2092 IRFB4227 IRAUDAMP9**


### **Parameters:**

- Power: 300W 8R (+ -75V), 600W 4R (+ -75V), 1000W 2R(+ -75V)
- Power supply voltage: DC+60V~+80V, (recommnd voltage DC+ -75V)
- Distortion:0.07 % THD+N 600W 2 R
- Voltage gain:33 DB
- Loading resistance: 2Ohm
- Weight:180g
- Size: 129MM\*72MM\*43MM
- Total Idle Power Consumption: 13.2W
- System Efficiency: 80% 600W 2R
- Dynamic Range : 99.4 DB
- Residual Noise: 290 UV
- Damping Factor:>70 (1K HZ ,2R)
- Frequency Response: 20Hz-20kHz + -1DB
- Thermal Performance temperature: Idling <60C  
125W <104C  
850W 2R< 118C (If always loading, it is better to add fan)

### **Package included:**

- 1 x Amplifier Board



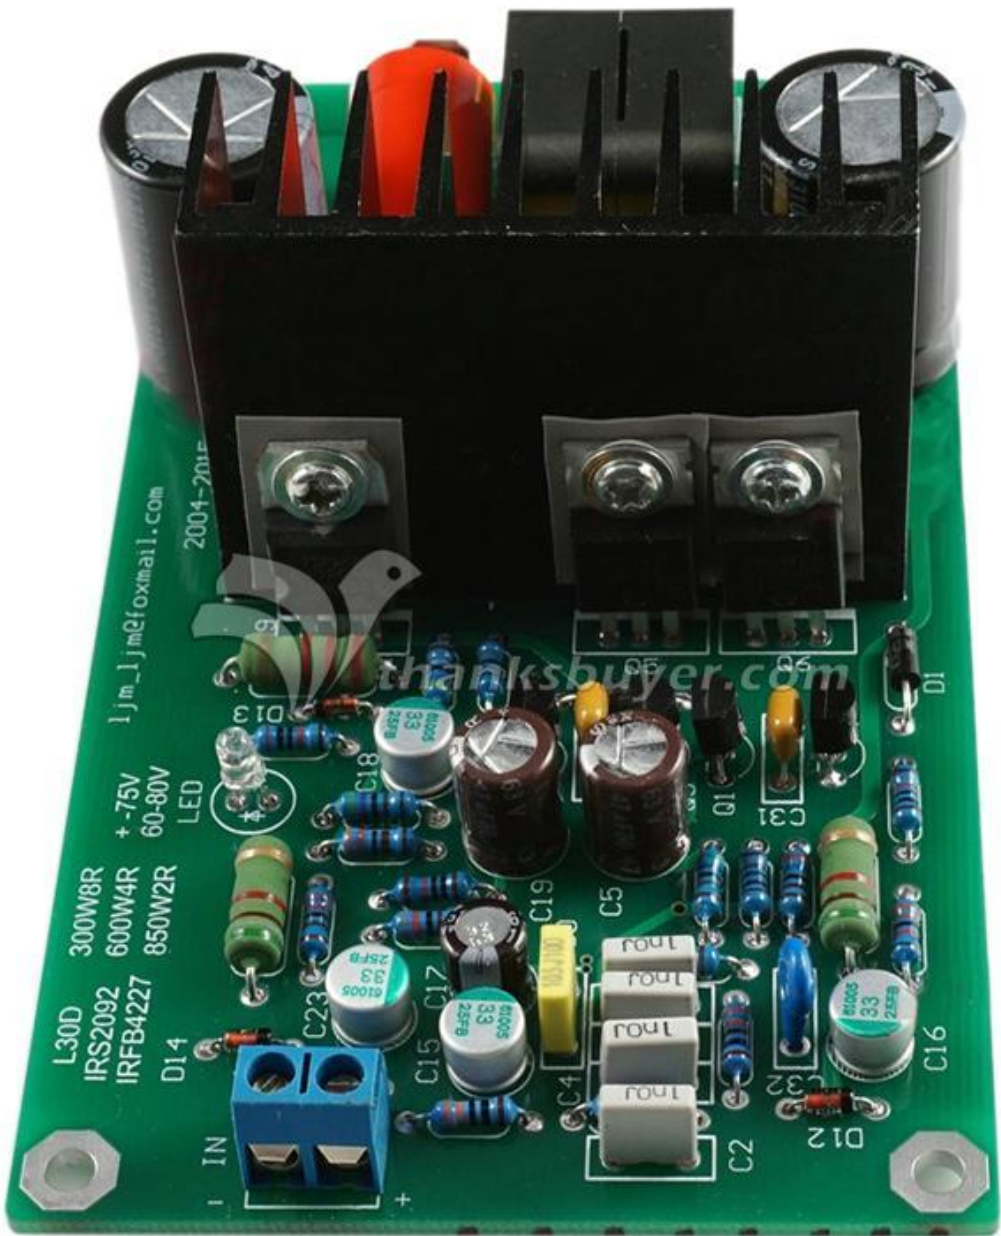

L30D 300W8R  
IRS2092 600W4R  
IRFB4227 850W2R

+75V  
60-80V  
LED

Ijm\_ljm@foxmail.com  
2004-2015



thanksbuyer.com